


## Technical data 500250


<i>Material</i>	100 % polyester spunbond with PTFE membrane, white
<i>Grammage</i>	260 g/m <sup>2</sup>
<i>Thickness</i>	0,72 mm
<i>Max. tensile strength</i>	500 N/5 cm
<i>Elongation at max. strength</i>	30 %
<i>Air permeability</i>	90 l/m <sup>2</sup> sec (200 Pa)
<i>Max. temperature</i>	150° C.
<i>EN 60335-2-69</i>	M
<i>EN 1822</i>	H13 - 0,3 micron

Contaminant	ISO Fine (200 mg/m <sup>3</sup> )
Air flow	200 m <sup>3</sup> /m <sup>2</sup> x h
Face velocity	0,056 m/sec
Test Area	100 cm <sup>2</sup>

INITIAL EFFICIENCY

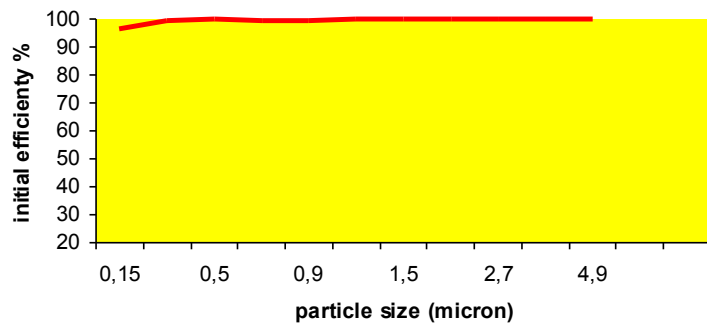

PRESSURE TEST

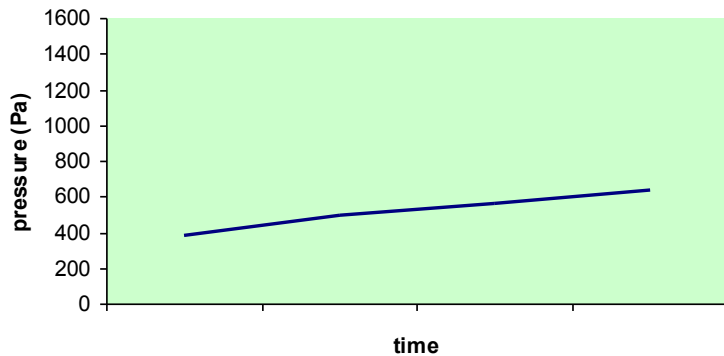

### Benefits

- Excellent dust cake release
- Reduced pressure drop
- Increased media life
- Less frequent cleaning
- Near zero emissions
- Inert in most filtration chemical environment
- Hydrophobic
- Higher temperature resistance